

Superconducting Magnet R&D Overview

S. Gourlay, LBNL

June 10, 2003

June 10, 2003

1

S. Gourlay



Outline

- Magnet Program Goals and Priorities
- Base Program Support
 - Magnet Development
 - Facilities
 - Conductor R&D
- R&D Strategy

June 10, 2003 2 S. Gourlay



US LARP Magnet Program

- Improve long-term physics research opportunities of the LHC
 - Provide technology choices for luminosity upgrade
- Extend US expertise in high-field accelerator magnets
 - Represents the first opportunity to use Nb₃Sn in an accelerator
 - Ensure continued leadership in Nb₃Sn technology
 - Advances the enabling technology for the next generation of hadron colliders
- Extend collaborative environment between national lab programs
- Develop world-wide collaboration on high-performance magnets
 - CERN, ESGARD, KEK, EU, etc.
 - · Archamps Workshop

June 10, 2003 3 S. Gourlay



LHC Accelerator Upgrades

- Luminosity (IR upgrade)
 - Options
 - IR I
- Initial program target Largest aperture quad with maximum gradient ~250 T/m
 - IR II
 - Largest aperture 2/1 quad with maximum gradient ~ 250 T/m
 - Large bore separation dipole with a field > 15 T
 - 2/1 dipole with a field > 15 T
- Energy Upgrade
 - Addressed by base programs at the 3 labs
 - Benefits from technology developed for luminosity upgrade

June 10, 2003 S. Gourlay



LARP Magnet Program

- An ambitious program focusing on Nb₃Sn
 - Large-aperture quadrupoles
 - · Required in all IR upgrade scenarios under consideration
 - Large-aperture, high-field, beam-separation dipoles
 - Required in most IR upgrade scenarios under consideration
- Builds on base program Nb₃Sn dipole R&D
- Initial program is to develop technologies, not specific designs
 - Technology Development includes model magnets
- Specific design choices will be made after several years of magnet R&D and related accelerator design studies

June 10, 2003 5 S. Gourlay



Base Program Support

- Integrate the three US laboratories and include university participation
 - Leveraged by
 - Existing technology base
 - Intellectual resources
 - Facilities

Existing Programs are essential to the success of LARP


- BNL React and wind Nb₃Sn and HTS studies
- FNAL Wind and react Nb₃Sn cos-theta dipoles
- LBNL High field, Nb₃Sn dipoles
- DOE/HEP Conductor Development Program

June 10, 2003 6 S. Gourlay



BNL Magnet R&D Facilities

- 5 Vertical Test Dewars (cold mass testing)
- 3 Horizontal test stations (full magnet testing)
- 2.5KW refrigerator complex (runs 365/24/7)
- Coil winding factory with 3 separate stations
- 2 Direct winding stations
- Coil and beam tube insulating station
- 3 magnet production lines (SNS, LHC, RHIC spares)
- 3 warm magnetic field measuring stations



June 10, 2003 7 S. Gourlay




FNAL Magnet R&D Facilities

- Cable insulating machine
- Winding tables: (2m,15m)
- Coil HT oven and retorts (1m)
- Epoxy impregnation facility (6m)
- Collaring/yoking presses (2m, 15m)
- Magnet test facilities (4m,15m)











LBNL Magnet R&D Facilities

- SC Magnet Test Facility
 - Control system/DAQ
 - 15 kA PS, 12kA extraction
 - Superfluid capability
 - 1 meter models
- Magnet Fabrication Shop
 - Coil winding
 - Reaction furnace
 - Vacuum vessel
 - G-10 shop
 - Materials Test System
 - 100,000 lb. Press








June 10, 2003 9 S. Gourlay



Strand and Cable R&D Facilities

- BNL, FNAL, LBNL
 - Strand and cable heat treat ovens
 - 28 and 60-strand cabling machines
 - SEM
 - Short sample strand test facilities
 - 15 17 Tesla solenoids
 - Sample prep
 - 2 kA power supply
 - Cable test facility (7.5 T, 4.2K, 25 kA)





Base Program FTE Profiles

- BNL
 - ~ 4 FTE's (2 Scientists, 1 Engineer, 1 Tech)
- FNAL

~ 13 FTE's (3 Scientists, 5 Engineers, 5 Techs)

Plus designers, facilities support, etc.


- LBNL
 - ~ 10 FTE's (3.5 Scientists, 2 Engineers, 4 Techs)

June 10, 2003 11 S. Gourlay



R&D Strategy


- Main Issues
 - High fields and gradients
 - Large beam-induced heat loads
- Extend and quantify limits on key performance parameters
- Issue-driven program designed to develop an enabling technology base for LHC upgrades



- 2003 05
 - Technology, simple models
- 2006 09
 - More complex models ($\sim 3/yr$)
- 2010 12
 - Accelerator-ready prototype



Program Profile

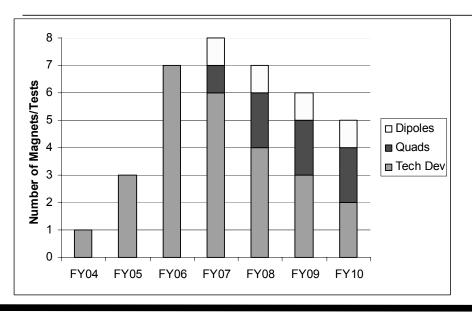

June 10, 2003 S. Gourlay



Summary

- Delayed funding turn-on
- Need to establish basis for future planning



- Highly leveraged, cost effective start
 - Fundamental issues specific to LARP requirements
- Focus on technology development

Goal: Accelerator-ready design – production start ~ 2012

A Very Challenging Task